


TankJet® 3150

FIXED TANK CLEANING NOZZLE

Stationary, Self-Draining Nozzle Ideal
for Barrel Rinsing

Features and Benefits

- Stationary design – no moving parts
- Choose 21 orifices for 360° coverage or 15 orifices for 210° coverage
- Can be installed in any position
- Durable, corrosion-resistant design
- 3/4" (19 mm) neck allows drainage during washing

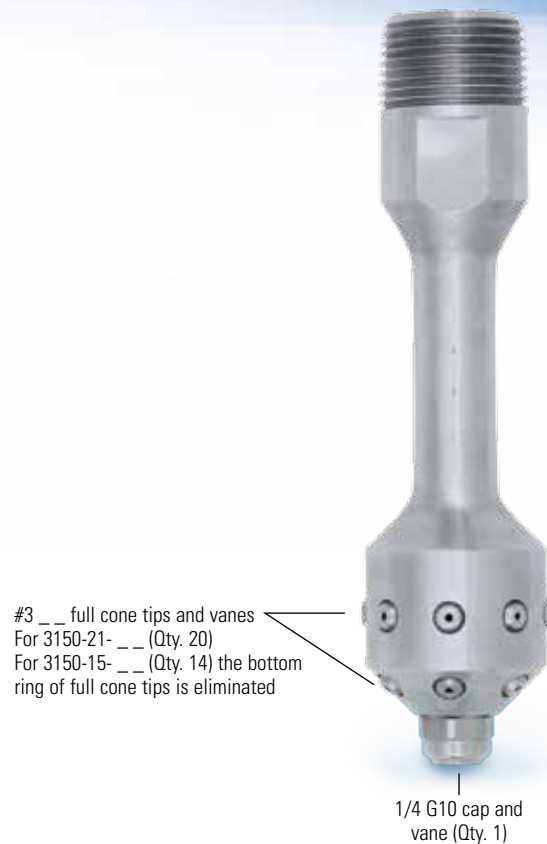


TankJet 3150
tank cleaning nozzle
for tanks up to 3' (0.9 m) in dia.

Specifications

Max. tank dia.:	3' (0.9 m)
Flow rate range:	5.2 to 26 gpm (23 to 91 l/min)
Pressure range:	10 to 150 psi (1 to 10 bar)
Max. operating temperature:	212°F (100°C)
Min. tank opening size:	2" (51 mm)
Spray coverage:	21 orifice version for 360° coverage 15 orifice version for 210° coverage
Materials:	Brass, 303 stainless steel, mild steel, 316 stainless steel
Inlet conn.:	1" NPT or BSPT (M)

Spray Coverage

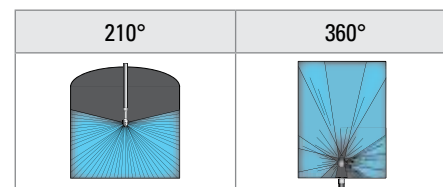


Ideal for Cleaning:

- Barrels
- Containers
- Drums
- Kegs
- Tubes
- Vessels

Performance Data

Nozzle No.	Max. Free Passage in. (mm)	Capacity gpm (l/min)							
		10 psi (1 bar)	20 psi (2 bar)	30 psi (3 bar)	40 psi (4 bar)	60 psi (5 bar)	80 psi (6 bar)	100 psi (7 bar)	150 psi (10 bar)
3150-15	0.040 (1.0)	5.2 (23)	7.2 (32)	8.7 (39)	9.9 (44)	12.1 (49)	13.8 (54)	15.3 (57)	19.0 (67)
3150-21	0.040 (1.0)	7.0 (31)	9.8 (43)	11.7 (52)	13.3 (59)	16.2 (66)	18.5 (73)	21 (77)	26 (91)

Dimensions and Weights

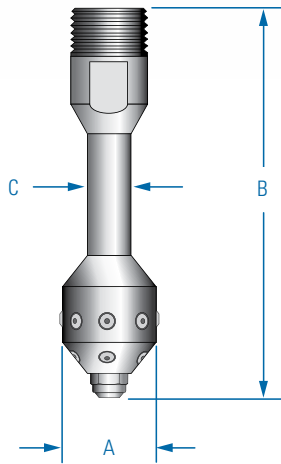

Nozzle No.	A Dia.	B	C Dia.	Weight
3150	1-11/16" (43 mm)	6-9/16" (167 mm)	3/4" (19 mm)	1-1/2 lbs. (0.68 kg)

Ordering Information

TankJet 3150 Tank Cleaning Nozzle			
3150	-	SS	15
Nozzle Type		Material Code	Number of Full Cone Spray Tips

Add B prior to the nozzle type for BSPT connections.